

POLAIR


АО «Полаир-Недвижимость»
425000, Республика Марий Эл,
г. Волжск, ул. Промбаза, 1
помещение 6, этаж 1, литер-А3
www.polair.com

ПРОЕКТ: _____
МОДЕЛЬ: CR3-L
КОЛИЧЕСТВО: _____
СОГЛАСОВАНИЕ: _____
ДАТА: 17.04.2026



CR3-L

Recommended retail price: 184 900 rub

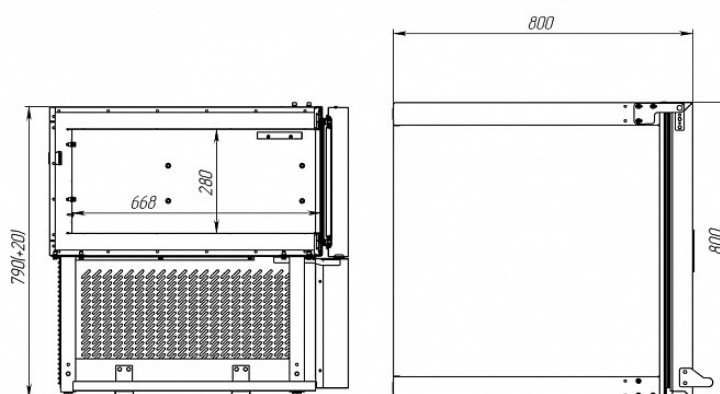

Technical specifications

Number of levels:	3
GN1/1 or EN 40x60 guide rails:	+
Distance between guide rails, mm:	68
Environmental conditions (t, °C / humidity, %):	up to +40
Dimensions:	800x860x785
Temperature in the room:	down to -35°C
Case wall thickness, mm:	61
Power supply system, V/Hz:	230 V (240 V)/50
Power consumption, W, max.:	550
Daily power consumption, kW/h, max:	550
Refrigerant:	R404/R452
Defrost type:	forced, by natural heat inflows when the door is open
Thermostat:	electronic control unit with classic display
Cooling:	+90...+3°C
Cooling time:	90 min.
Mass of cooled product, kg:	11

Soft cooling mode:	+
Weight of frozen product, kg:	7
Freezing time:	240 minutes.
Freezing:	+90...- 18°C
Rapid freezing mode:	+
Thermocouple:	+
Material of the interior cladding of the body:	stainless steel
Placement of gastronorm containers/trays:	on rails for GN1/1 and EN 40x60

The manufacturer reserves the right to make changes that do not fundamentally affect the operational properties of the equipment without prior notice.