

POLAIR

АО «Полаир-Недвижимость»
425000, Республика Марий Эл,
г. Волжск, ул. Промбаза, 1
помещение 6, этаж 1, литер-А3
www.polair.com

ПРОЕКТ:

МОДЕЛЬ:

MB328S

КОЛИЧЕСТВО:

СОГЛАСОВАНИЕ:


ДАТА:

23.10.2026

RG



MB328S

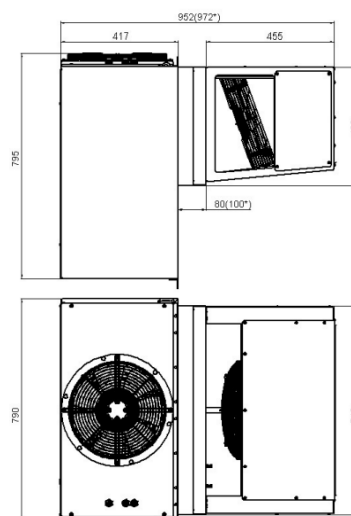

Technical specifications

Overall dimensions:	925x790x795
Temperature range, °C:	-15...-25
Power supply system, V/Hz:	380/50
Power consumption, W, max.:	2300
Daily power consumption, kW/h, max:	30
Refrigerant:	R404A
Defrost type:	electric
R404 refill dose, g:	1700
Condenser:	Copper-aluminum
Rib pitch, mm:	3,2
Surface area, m ² :	19,5
Number of fans, pcs.:	1
Fan power, W/rpm:	105/1350
Impeller diameter, mm:	315
Performance, m ³ /hour:	1850
Air cooler:	Copper-aluminum
Rib pitch, mm:	3,6
Surface area, m ² :	15

Number of air cooler fans, pcs.:	1
Fan power, W/rpm:	105/1350
Impeller diameter, mm:	315
Performance, m ³ /hour:	1850
Air jet range, m:	9
External power cable:	4x1,5+1x1,5
Power connector/cable:	2x0.75
80 mm room, m ³ , at ambient temperature 25°C:	21,0 ... 31,0
100 mm room, m ³ , at ambient temperature 25°C:	23,0 ... 33,0

The manufacturer reserves the right to make changes that do not fundamentally affect the operational properties of the equipment without prior notice.