

POLAIR

АО «Полаир-Недвижимость»
425000, Республика Марий Эл,
г. Волжск, ул. Промбаза, 1
помещение 6, этаж 1, литер-А3
www.polair.com

ПРОЕКТ:

МОДЕЛЬ:

CRT20-L

КОЛИЧЕСТВО:

СОГЛАСОВАНИЕ:






ДАТА:

17.04.2026



CRT20-L

Recommended retail price: 649 900 rub

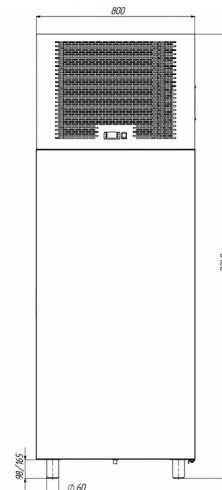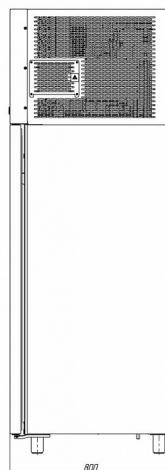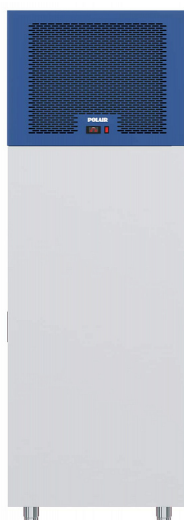

Technical specifications

Number of levels:	20
GN1/1 or EN 40x60 guide rails:	+
Distance between guide rails, mm:	68
Environmental conditions (t, °C / humidity, %):	up to +40
Dimensions:	800x800x2240
Temperature in the room:	down to -35°C
Case wall thickness, mm:	61
Power supply system, V/Hz:	380 V (400 V)/50
Power consumption, W, max.:	3100
Refrigerant:	R404/R452
Defrost type:	forced, by natural heat inflows when the door is open
Thermostat:	electronic control unit with classic display
Cooling:	+90...+3°C
Cooling time:	90 min.
Mass of cooled product, kg:	90
Soft cooling mode:	+

Weight of frozen product, kg:	70
Freezing time:	241 minutes
Freezing:	+90...- 18°C
Rapid freezing mode:	+
Thermocouple:	+
Material of the interior cladding of the body:	stainless steel
Placement of gastronorm containers/trays:	on rails for GN1/1 and EN 40x60

The manufacturer reserves the right to make changes that do not fundamentally affect the operational properties of the equipment without prior notice.