

# POLAIR


АО «Полаир-Недвижимость»  
425000, Республика Марий Эл,  
г. Волжск, ул. Промбаза, 1  
помещение 6, этаж 1, литер-А3  
[www.polair.com](http://www.polair.com)

ПРОЕКТ: \_\_\_\_\_  
МОДЕЛЬ: MB328S  
КОЛИЧЕСТВО: \_\_\_\_\_  
СОГЛАСОВАНИЕ: \_\_\_\_\_  
ДАТА: 29.04.2026



## MB328S

Recommended retail price: 225 138 rub

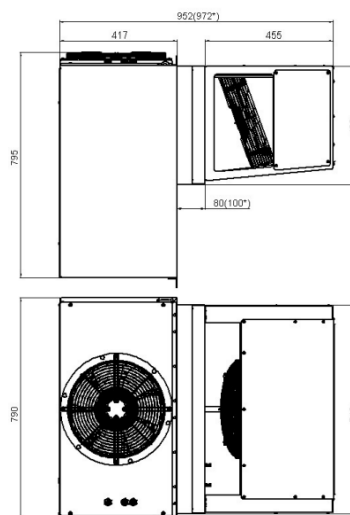

### Technical specifications

Overall dimensions:	925x790x795
Temperature range, °C:	-15...-25
Power supply system, V/Hz:	380/50
Power consumption, W, max.:	2300
Daily power consumption, kW/h, max:	30
Refrigerant:	R404A
Defrost type:	electric
R404 refill dose, g:	1700
Condenser:	Copper-aluminum
Rib pitch, mm:	3,2
Surface area, m <sup>2</sup> :	19,5
Number of fans, pcs.:	1
Fan power, W/rpm:	105/1350
Impeller diameter, mm:	315
Performance, m <sup>3</sup> /hour:	1850
Air cooler:	Copper-aluminum

Rib pitch, mm:	3,6
Surface area, m <sup>2</sup> :	15
Number of air cooler fans, pcs.:	1
Fan power, W/rpm:	105/1350
Impeller diameter, mm:	315
Performance, m <sup>3</sup> /hour:	1850
Air jet range, m:	9
External power cable:	4x1,5+1x1,5
Power connector/cable:	2x0.75
80 mm room, m <sup>3</sup> , at ambient temperature 25°C:	21,0 ... 31,0
100 mm room, m <sup>3</sup> , at ambient temperature 25°C:	23,0 ... 33,0

The manufacturer reserves the right to make changes that do not fundamentally affect the operational properties of the equipment without prior notice.