

POLAIR


АО «Полаир-Недвижимость»
425000, Республика Марий Эл,
г. Волжск, ул. Промбаза, 1
помещение 6, этаж 1, литер-А3
www.polair.com

ПРОЕКТ: _____
МОДЕЛЬ: MB211S _____
КОЛИЧЕСТВО: _____
СОГЛАСОВАНИЕ: _____
ДАТА: 29.04.2026 _____



MB211S

Recommended retail price: 137 129 rub

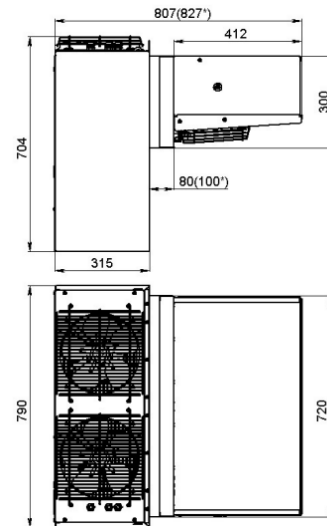

Technical specifications

Overall dimensions:	827x790x704
Temperature range, °C:	-15...- 25
Power supply system, V/Hz:	220/50
Power consumption, W, max.:	1300
Daily power consumption, kW/h, max:	26
Refrigerant:	R404A
Defrost type:	electric
R404 refill dose, g:	800
Condenser:	Copper-aluminum
Rib pitch, mm:	3,2
Surface area, m ² :	11,14
Number of fans, pcs.:	2
Fan power, W/rpm:	18/1300
Impeller diameter, mm:	254
Performance, m ³ /hour:	1200
Air cooler:	Copper-aluminum

Rib pitch, mm:	3,6
Surface area, m ² :	8,93
Number of air cooler fans, pcs.:	2
Fan power, W/rpm:	18/2600
Impeller diameter, mm:	200
Performance, m ³ /hour:	1200
Air jet range, m:	4
External power cable:	2x1,5+1x1,5
Power connector/cable:	2x0.75
80 mm room, m ³ , at ambient temperature 25°C:	3,9 ... 10,2
100 mm room, m ³ , at ambient temperature 25°C:	4 ... 12,7

The manufacturer reserves the right to make changes that do not fundamentally affect the operational properties of the equipment without prior notice.