

# POLAIR


АО «Полаир-Недвижимость»  
425000, Республика Марий Эл,  
г. Волжск, ул. Промбаза, 1  
помещение 6, этаж 1, литер-А3  
[www.polair.com](http://www.polair.com)

ПРОЕКТ: \_\_\_\_\_  
МОДЕЛЬ: MB216S  
КОЛИЧЕСТВО: \_\_\_\_\_  
СОГЛАСОВАНИЕ: \_\_\_\_\_  
ДАТА: 29.04.2026



## MB216S

Recommended retail price: 166 781 rub

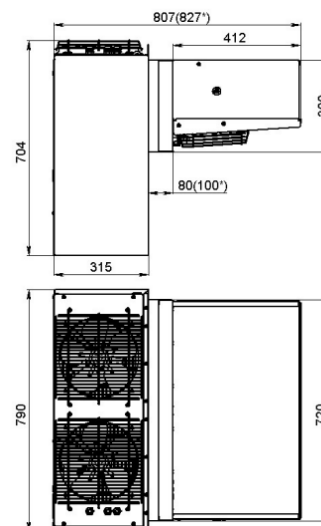

### Technical specifications

Overall dimensions:	827x790x704
Temperature range, °C:	-15...- 25
Power supply system, V/Hz:	380/50
Power consumption, W, max.:	2100
Daily power consumption, kW/h, max:	30
Refrigerant:	R404A
Defrost type:	electric
R404 refill dose, g:	900
Condenser:	Copper-aluminum
Rib pitch, mm:	3,2
Surface area, m <sup>2</sup> :	11,14
Number of fans, pcs.:	2
Fan power, W/rpm:	18/1300
Impeller diameter, mm:	254
Performance, m <sup>3</sup> /hour:	1200
Air cooler:	Copper-aluminum

Rib pitch, mm:	3,6
Surface area, m <sup>2</sup> :	8,93
Number of air cooler fans, pcs.:	2
Fan power, W/rpm:	18/2600
Impeller diameter, mm:	200
Performance, m <sup>3</sup> /hour:	1200
Air jet range, m:	4
External power cable:	4x1,5+1x1,5
Power connector/cable:	2x0.75
80 mm room, m <sup>3</sup> , at ambient temperature 25°C:	7,1 ... 15,2
100 mm room, m <sup>3</sup> , at ambient temperature 25°C:	8 ... 19

The manufacturer reserves the right to make changes that do not fundamentally affect the operational properties of the equipment without prior notice.